


Product data sheet uvex silv-Air 7330 FFP3 R D

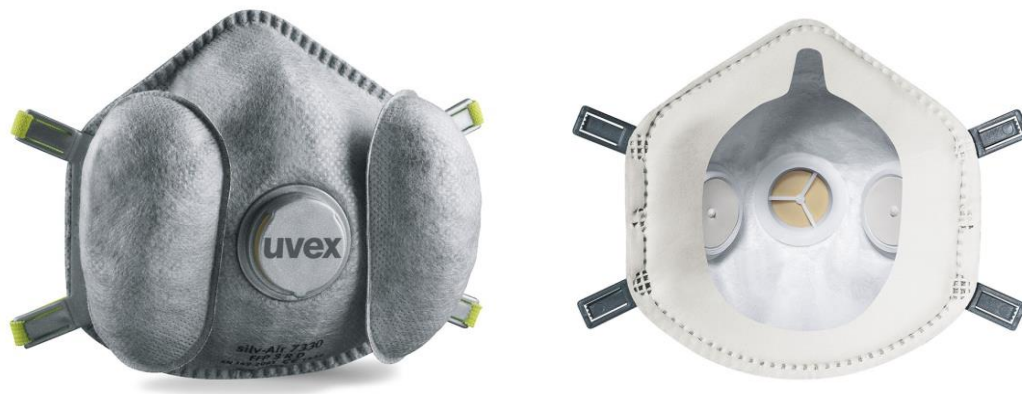

Product information

Product features	<ul style="list-style-type: none"> • Particle-filtering cup shape mask with exhalation valve • Protection level FFP 3 • High-Performance, three-chamber climazone system • Innovative design with optimized shape • 4-point headband attachment allows an individual and secure fit • Integrated, flexible, adjustable nose clip • Exhalation valve reduces breathing resistance and build-up of heat and moisture in the mask • 2 extra filters with inhalation valve for low breathing resistance and more comfort • High-quality uvex silv-Air outer material for best possible breathability • Ultra-soft, all-round sealing lip • Nasal recess at sealing lip ensures a perfect fit for almost any nose shape • Mask fulfils the requirements of reusability (R) and the dolomite dust test (D) 												
Materials	<table border="0"> <tr> <td>Headband:</td> <td>textile</td> </tr> <tr> <td>Headband clips:</td> <td>Polypropylene</td> </tr> <tr> <td>Sealing lip:</td> <td>synthetic foam</td> </tr> <tr> <td>Nose clip:</td> <td>metal, PP</td> </tr> <tr> <td>Filter/mask:</td> <td>PP, Polyester</td> </tr> <tr> <td>Valve:</td> <td>PP</td> </tr> </table>	Headband:	textile	Headband clips:	Polypropylene	Sealing lip:	synthetic foam	Nose clip:	metal, PP	Filter/mask:	PP, Polyester	Valve:	PP
Headband:	textile												
Headband clips:	Polypropylene												
Sealing lip:	synthetic foam												
Nose clip:	metal, PP												
Filter/mask:	PP, Polyester												
Valve:	PP												
Weight	36 g												
Standard	EN 149:2001 + A1:2009												

Versions & Accessories

Article number	Colour/Version	Retail unit
8707.330	cup shape mask FFP3, silver with three-chamber-system	3 pcs. per box
8701.011	uvex clear cleaning spray	1 can, 360ml

Packaging sizes

Box	approx. 175 x 255 x 125 mm
Outer Carton	approx. 410 x 370 x 610 mm

Maximum breathing resistance acc. to EN149 in mbar

	Inhalation resistance 30l/min.	Inhalation resistance 95l/min.	Exhalation resistance 160l/min.
FFP1	0,6	2,1	3,0
FFP2	0,7	2,4	3,0
FFP3	1,0	3,0	3,0

Areas of use*

The respiratory protection mask can be used against solid, aqueous and non-volatile liquid aerosols up to 30 times the respective limit values.	Woodworking, hard wood, chromium, asbestos (short periods of work), stainless steel, lead, welding, dust that contain beryllium, arsenic, cadmium or cobalt. Medical waste disposal, fungal spores, legionella bacteria, infections, viruses, bacteria, enzyme, nanoparticles.
--	--

*Please note that the above mentioned areas of use are examples only. The selection of PPE needs to be carried out by a competent person, in conjunction with relevant and current legislation.

All respiratory protective devices fall into PPE category III (high risks).

Uvex accepts no liability for any possible harm or damage which may result from this information.
This data sheet does not replace a detailed risk assessment nor seeking specialist advice.

UVEX ARBEITSSCHUTZ GMBH, Würzburger Str. 181-189, D-90766 Fürth