

**Product Datasheet model uvex ultrashield 9122 885**

**UVEX ARBEITSSCHUTZ GMBH, Würzburger Str. 181-189,  
D-90766 Fürth**

**1. Product Characteristics**

- extremely sporty safety spectacles, ideal for fashion-conscious wearers
- very large lens design for an unrestricted, wide field of vision and increased safety
- soft-grip temple ends provide a comfortable, secure fit without pressure
- soft, adjustable nose piece makes it possible to adjust the glasses to the wearer and ensures a comfortable, non-slip, pressure-free fit
- robust polycarbonate lens with UV400 – 100% protection against dangerous UV radiation up to 400 nm

## 2. Technical Details Body

### Frame

|          |              |
|----------|--------------|
| Material | PC, TPR      |
| Colour   | white, black |

### Marking

|                                   |            |
|-----------------------------------|------------|
| Applicable EN ISO norm            | 16321      |
| Manufacturer 's ID code           | W          |
| Impact resistance                 | C (45 m/s) |
| Tested under extreme temperatures | T          |
| Conformity symbol                 | CE         |

## 3. Technical Details Lens

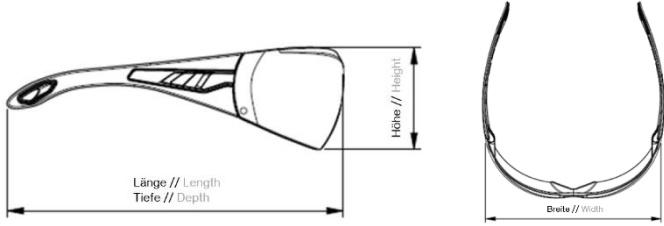
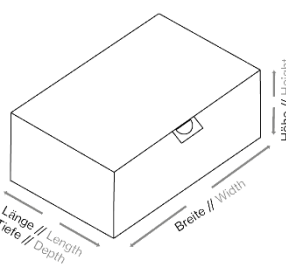

|               |                           |
|---------------|---------------------------|
| Material      | PC                        |
| Thickness     | 2.0 mm at PD              |
| Coating       | anti-fog on the inside    |
| Tint          | Blue mirror, grey 14%     |
| Features tint | Signal colour recognition |
| UV protection | UV400                     |

### Marking

|                                   |                                                                                     |
|-----------------------------------|-------------------------------------------------------------------------------------|
| Manufacturer 's ID code           | W                                                                                   |
| Filter                            | G3                                                                                  |
| Impact resistance                 | C (45 m/s)                                                                          |
| Tested under extreme temperatures | T                                                                                   |
| Optical class                     | 1                                                                                   |
| Conformity symbol                 | CE                                                                                  |
| Factory symbol                    |  |

## 4. Logistical Information

### Product

|                                               |                                                                                                                      |                                                                                     |                                                                                      |
|-----------------------------------------------|----------------------------------------------------------------------------------------------------------------------|-------------------------------------------------------------------------------------|--------------------------------------------------------------------------------------|
| Weight                                        | 33g                                                                                                                  |                                                                                     |                                                                                      |
| Dimensions<br>(L x W x H)<br>in approx.<br>mm |  <p>picture only for reference</p> |                                                                                     |                                                                                      |
|                                               | 172 x 151 x 57                                                                                                       |                                                                                     |                                                                                      |
|                                               | <b>Packing unit 1</b>                                                                                                | <b>Packing unit 2</b>                                                               | <b>Packing unit 3</b>                                                                |
| EAN Code                                      | 4066853051992                                                                                                        | 4066853052005                                                                       | 4066853052012                                                                        |
| Quantity in pcs.                              | 1                                                                                                                    | 8                                                                                   | 128                                                                                  |
| Dimensions<br>(L x W x H)<br>in approx.<br>mm |  <p>picture only for reference</p> |  |  |
|                                               | 127 x 267 x 60                                                                                                       | 185 x 290 x 97                                                                      | 600 x 400 x 400                                                                      |
| Net weight in approx. g                       | 33                                                                                                                   | 164                                                                                 | 4,224                                                                                |
| Gross weight in approx. g                     | 49                                                                                                                   | 495                                                                                 | 8,056                                                                                |
| Country of Origin                             | Taiwan                                                                                                               |                                                                                     |                                                                                      |

## 5. Miscellaneous

|              |                |
|--------------|----------------|
| Standards    | EN ISO 16321-1 |
| PPE Category | Category II    |