


Product data sheet of tailor made hearing protection
high-fit duro detec 32

Material number: 6170.432

UVEX ARBEITSSCHUTZ GmbH, Siegelsdorfer Straße 1, D-90768 Fürth

Product characteristics:

- Individually moulded hearing otoplastic
- Duroplast material which permanently holds its shape
- Smooth, even surface
- Shaped grip for easy handling
- Absolutely silicone-free-
well suited for use in paintshops
- Can be easily cleaned

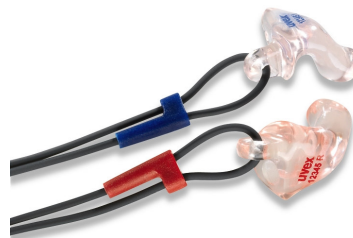**Detec:**

- The detectable variants of the uvex high-fit duro otoplastics are equipped with a metal ball bearing and a detectable blue rubber band to ensure they can be found by metal detectors.

Material:	Otoplastic:	Duroplast equipped with a metal ball
	Cord:	PVC
	Cord adjusting clips:	SEBS
Cord length:		800 mm


Spare filter:

Art.-No.	6177.056
SNR	32 dB
Additional application	S,V,W,E
Colour	yellow

Attenuation data:

high-fit duro 32 (yellow filter element)

SNR 32dB	H 33dB	M 29dB	L 27dB	Classification: S,W,V,E				
f / Hz	63	125	250	500	1000	2000	4000	8000
Attenuation / dB	31	31	30,2	32,3	35,3	35,2	40,5	43,4
SD / dB	5,6	6,6	4,9	6,1	6,9	3,5	3,1	5,3
APV / dB	25,4	24,4	25,3	26,2	28,4	31,7	37,4	38,1

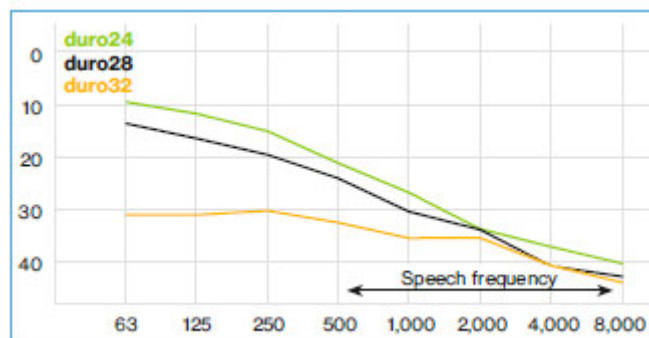

Standard: EN 352-2