

Product Datasheet model uvex OTG plus 9139 265



As of 08/2025

**UVEX ARBEITSSCHUTZ GMBH, Würzburger Str. 181-189,
D-90766 Fürth**

1. Product Characteristics

- modern overspecs for prescription spectacles wearers with extremely large, flat lens offer maximum compatibility and excellent vision
- frame with innovative multi-incline points allows for a high level of individualization to ensure a good fit for all facial shapes and head widths
- ergonomically shaped, flat side arms with soft-grip temple ends provide a comfortable, secure fit without pressure
- nose bridge designed for all-day wearer comfort and optimal compatibility with respiratory masks
- robust polycarbonate lens with uvex's proven supravision coating technology – permanent anti-fog and scratch-resistant lens
- UV400 – 100% protection against dangerous UV radiation up to 400 nm
- metal-free

2. Technical Details Body

Frame

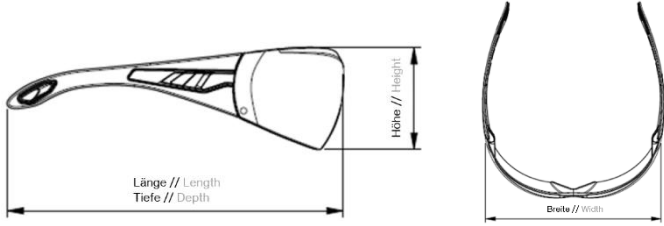


Material	PC-PBT, TPE
Version	multi-incline points
Colour	black

Marking	
Applicable EN ISO norm	16321
Manufacturer 's ID code	W
Impact resistance	C (45 m/s)
Tested under extreme temperatures	T
Conformity symbol	CE

3. Technical Details Lens	
Material	PC
Thickness	2.1 mm at PD
Coating	uvex supravision excellence
Tint	clear
Features tint	Signal colour recognition
UV protection	UV400
Marking	
Manufacturer 's ID code	W
Filter	UL
Tinting level	1.2
Impact resistance	C (45 m/s)
Tested under extreme temperatures	T
High-mass impact	HM
Tested under extreme temperatures	T
Optical class	1
Scratch resistance	K
Antifog	N
Conformity symbol	CE
Factory symbol	

4. Logistical Information

Product

Weight	46g		
Dimensions (L x W x H) in approx. mm	 picture only for reference		
	160 x 157 x 65		
	Packing unit 1	Packing unit 2	Packing unit 3
EAN Code	4066853056690	4066853056706	4066853056713
Quantity in pcs.	1	8	128
Dimensions (L x W x H) in approx. mm	 picture only for reference		
	80 x 165 x 68	290 x 190 x 97	600 x 400 x 400
Net weight in approx. g	46	368	5,888
Gross weight in approx. g	62	600	10,480
Country of Origin	Germany		

5. Miscellaneous

Standards	EN ISO 16321-1
PPE Category	Category II